



## INSTALL A TRANSPONDER ON A MOTORCYCLE

The mounting position of the transponder of a rechargeable or Direct Powered transponder is the same. The position must be identical on all motorcycles competing in the race. Fix the transponder vertically, at a maximum of 120 cm (4 ft) above the track. Make sure that the transponder has a clear view to the track with no metal or carbon fiber underneath. Maximum operating temperature should not exceed 122F/50°C.

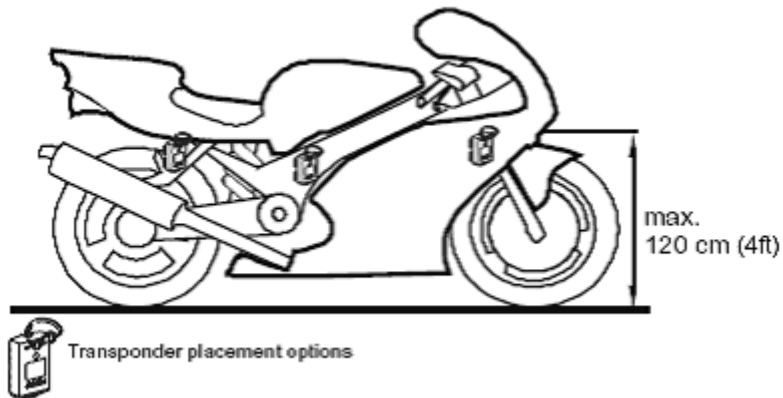

### Installation of a rechargeable transponder

Fix the holder on the motorcycle with the fixing rod on top by using tie-wraps, screws or rivets. Fasten the transponder using the supplied fixing pin.

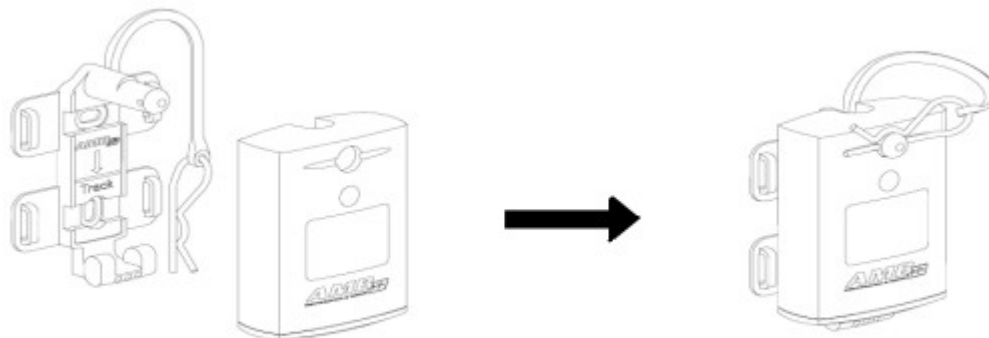


### Fastening the rechargeable transponder in the holder

## WARNING

A detached transponder can be very dangerous! Make sure the transponder cannot get detached. Use additional tie-wraps to secure the pin.

## Installation of a Direct Powered transponder

Make sure the transponder is mounted using pop rivets or screws on all four fixing holes of the transponder. Use additional tie-wraps for securing the transponder and cable.

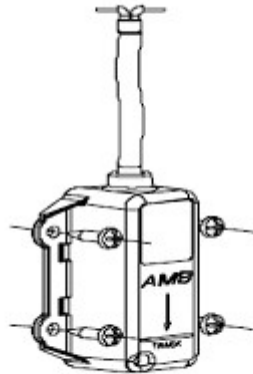

**Fastening the Direct Powered transponder**